



**SAMSON™**  
Bulk Materials  
Receiving Unit

**SAMSON**  
AUMUND GROUP

# CONTENT

3 Surface Installation

4 The SAMSON™ Solution

5 Universal Application

6 Operational Concept

7 Discharge Rate Control

8 Body & Entry Designs

9 SAMSON™ Construction

10 Dust & Fume Control

11 Enclosure Systems

12 Discharge Interface

13 Feeder Options

14 Alternative Fuels

15 Mechanical Drive

16 Instrumentation

17 Electrical Controls

18 Sizing and Screening

19 Storage Solutions

20 Under Floor Options

21 Railcar Discharge

22 Related Products

23 After Sales & Service



SAMSON™ Feeder integrated to a Mobile Shiploader receives Copper and Gold Concentrate

## A unique concept

SAMSON Materials Handling Ltd. developed the SAMSON™ surface feeder concept to satisfy the demands of clients requiring a mobile solution to receive general bulk materials such as coal and aggregates direct from tipping trucks in mainly Ship Loading applications where fixed plant was not a viable option. The SAMSON™ concept eliminated the need for any truck ramps or fixed civil work and was rapidly extended to fixed plant projects where the flexibility of surface installation is a clear benefit, particularly in port applications where the high ground water level makes conventional underground pits expensive to construct and maintain.



Mobile SAMSON™ receives as-mined Limestone from Articulated Trucks



SAMSON™ Clinker Intake for Cement Grinding Plant with integrated Dust Extraction





Twin SAMSON™ Surface Feeders receive minus 25 mm Limestone for the Flue Gas De-Sulphurisation system in a US Power Plant

## Surface Installation




SAMSON™ Raised Discharge permits transfer direct to surface mounted belt conveyor


The SAMSON™ provides a compact solution this intake facility for crushed Limestone delivered by trucks to the power plant working on a merry-go-round basis from a local quarry only 10 miles distant. A fast track flexible solution requiring the minimum of ground works.



- No Deep Pits.
- No Underground Hoppers.
- No Expensive Civil Works.
- Flexibility of Location.
- One Piece Integrated Machine.
- Receives Direct from Trucks.
- Receives Direct from Shovels.
- Buffer Holding Capacity.
- Fast Truck Discharge.
- Controlled Rate Feeding.
- Handles Dry and Dusty Materials.
- Reduced Dust Generation.
- Handles Wet and Sticky Materials.
- No Risk of Bridging or Blockage.
- Reduced Energy Consumption.
- Easy Maintenance Access.
- Easy Housekeeping Access.
- Reliable in Service.
- Proven References Worldwide.

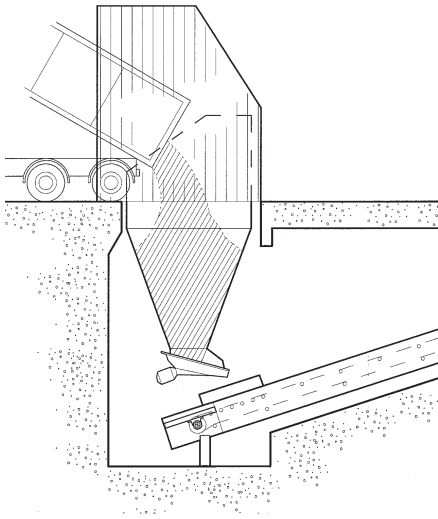

Illustrated above a conventional underground truck tipping hopper with deep pit and feeder discharging to an inclined belt conveyor to raise the material out of the pit and to the associated process plant. Requires permanent and expensive civil works and cannot be relocated to accommodate plant development.

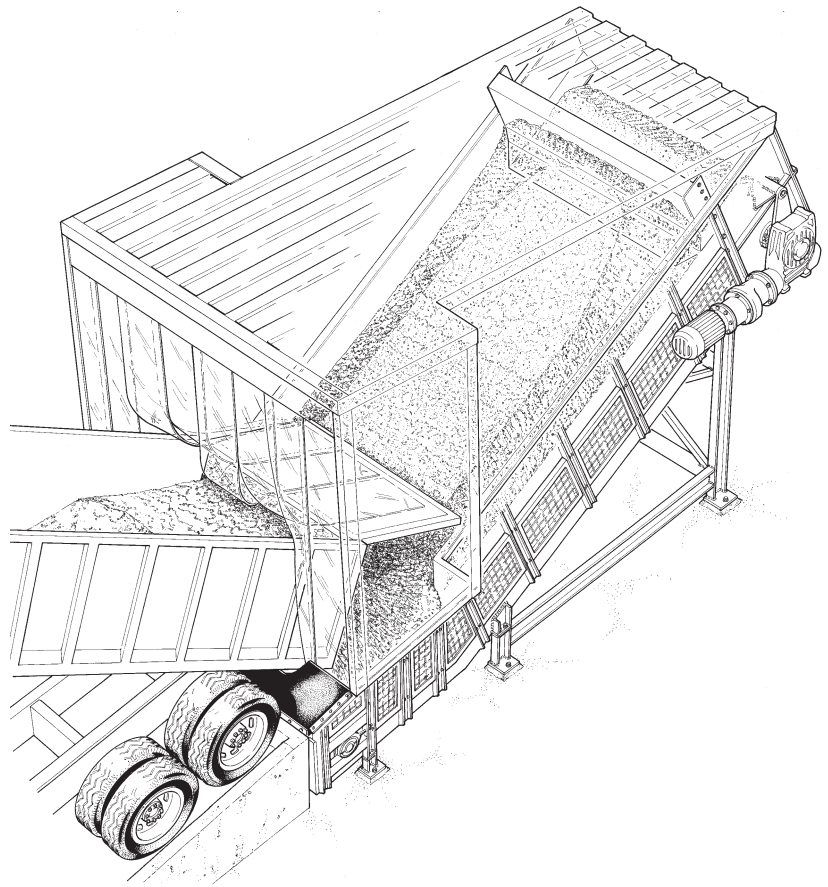

The SAMSON™ Bulk Material Receiving Unit Truck Dump Station

## An economical solution




In this Cement Grinding Plant located in the London Docklands two SAMSON™ Surface Feeders intake Cement Clinker plus Gypsum






The wide Apron-Belt design permits a very low loading height allowing the trucks to discharge direct to the entry section with only a small access ramp.

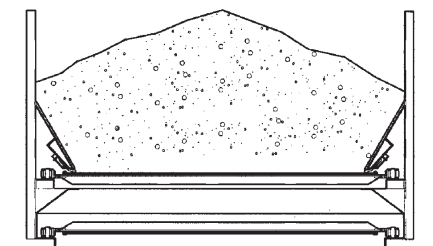

Wide Belt Design Eliminates Bridging




The wide Apron-Belt design combines the strength of a Steel Apron Feeder with the cleanliness of a Belt Feeder. Since the material depth is less than the belt width the bridging and blockages associated with conventional tapered hoppers is completely eliminated guaranteeing reliable discharge.

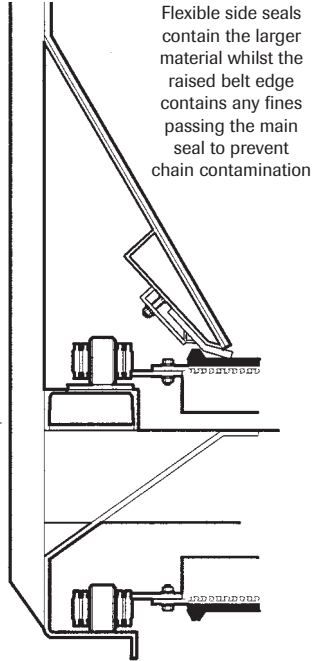

Highly developed over many years the SAMSON™ side seal contains the material within the body preventing spillage.


# Construction Concept

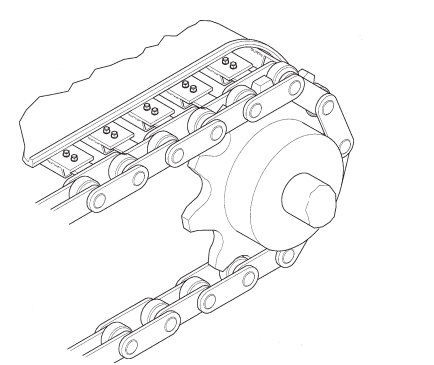


Trapezoidal shaped apron bars at every chain pitch provide maximum support and allow minimum sprocket diameter.




Flexible Side Seal with outer Belt Ledge

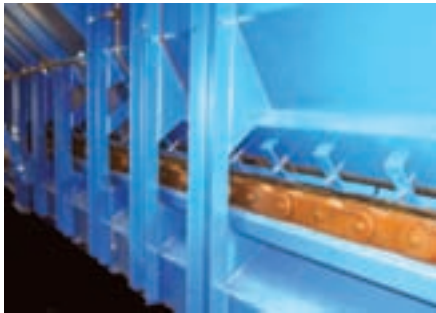

External Chains Outside the Material Flow

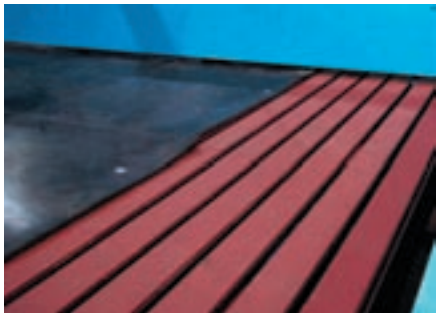

Steel Apron Bars Support the Load

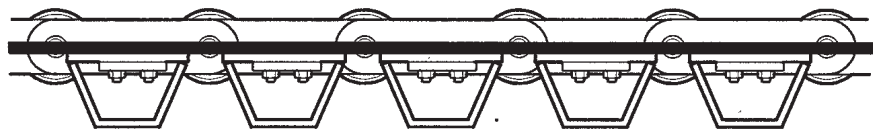

Conveyor Belt Aligned with the Chain Pin Centre and Rivetted to the Steel Apron Bars



Load Carried on the Chain Rollers




Broken Glass is received by the SAMSON™ at a Recycling Operation

## Operational Concept

Material is drawn from the tipping truck into the SAMSON™ body by the forward moving apron-belt conveyor. The operating concept can be divided into three stages as illustrated.

### Stage A:

The first truck arrives and discharges its material on to the forward moving SAMSON™ apron-belt. As the SAMSON™ belt moves forward so the material is drawn from the truck body.

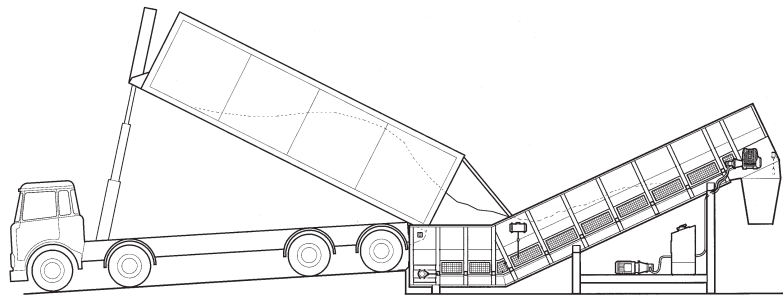


**A**

Material is drawn into the empty SAMSON™ body by the forward moving Apron-Belt

### Stage B:

When the truck is empty it departs the SAMSON™ and the material contained within the SAMSON™ is continually discharged to the following conveyor system. The material moves forward and the SAMSON™ entry section is exposed.

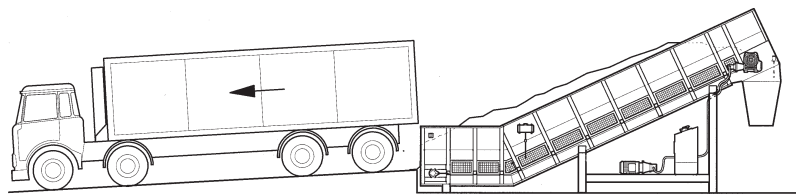


**B**

The Complete Truck Contents transferred to the SAMSON™ body

### Stage C:

After the first truck has departed the following truck reverses into position. During this time period the forward moving SAMSON™ apron-belt has exposed the entry section ready to accept the next truck contents.

And so it goes on...

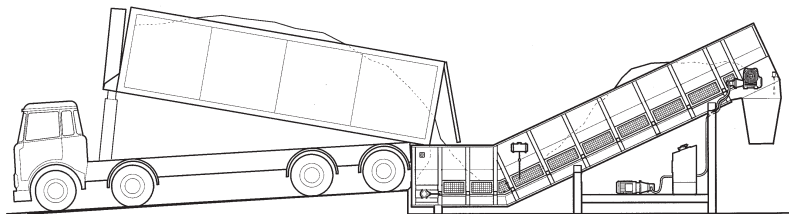

**C**


During the Truck Manoeuvring Cycle the SAMSON™ Entry empties ready to accept the next load





Material Stored within the SAMSON™ body may be at various Load Levels along the length of the SAMSON™

## Discharge Rate Control

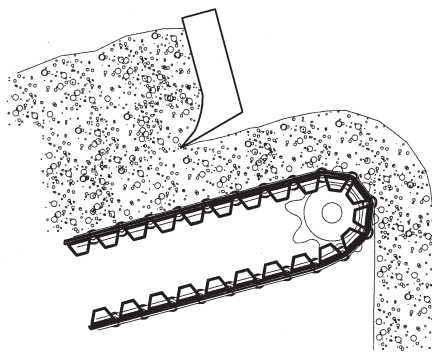

Levelling Blade controls the material bed depth at the SAMSON™ Discharge

As material is transferred from the truck or shovel to the SAMSON™ the load level varies from zero to 100 % along the machine length. Since the output rate is proportional to the material bed depth and belt speed it is necessary to regulate the bed depth such that the output rate may be controlled by varying only the belt speed.

The Levelling Blade solution maintains a constant bed depth at the discharge by cutting the peaks into the troughs and enables the final output rate to be closely regulated. For extremely cohesive materials the rotating Teaser shown right performs the same task by cutting the flow into manageable pieces.



Rotating Teaser provides a closely controlled discharge rate handling wet clay



The SAMSON™ with Deflected Chassis and Parallel Entry (width 3.0 m) receives Broken Glass from both Tipping Trucks and Shovels

## Body and Entry Designs

The SAMSON™ Deflected Chassis design provides a near horizontal loading section to receive material from tipping trucks to maximise the entry volume and eliminate any risk of the truck tailgate fouling the apron-belt.

For use only with Shovels the Straight Chassis design is adequate to maintain the SAMSON™ holding volume.

For operation with trucks the access ramp height directly controls the SAMSON™ entry volume and therefore the time required to discharge the truck.


Illustration A shows a standard ramp giving a reasonable entry capacity of say 10 tons.

Illustration B shows a raised ramp height giving an increased entry volume to reduce the truck tipping time and increase the overall average handling rate.


For operation with multiple truck designs the Universal Truck Entry provides total flexibility.




The SAMSON™ with Straight Chassis and Flared Entry (width 4.5 m) receives Sandy Clay from Shovels

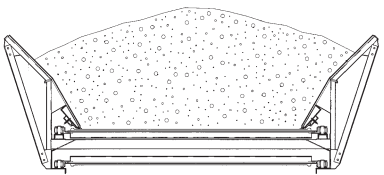


Flare Entry width from 4.0 to 6.0 m.

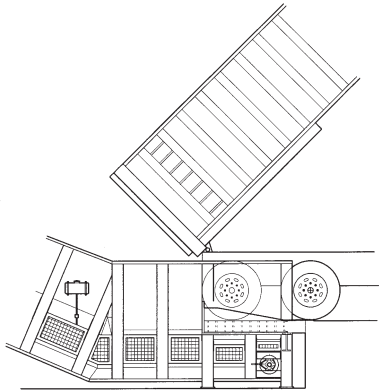

Universal Truck Entry for All Truck Types

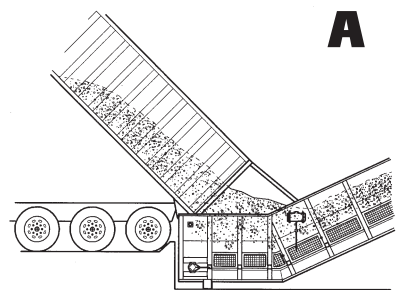

Standard Ramp

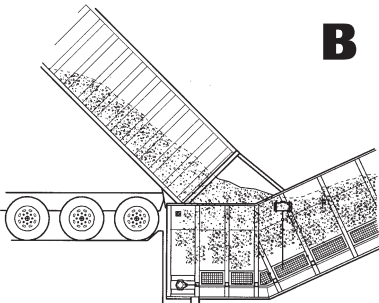

Raised Ramp for Greater Entry Volume



The SAMSON™ is available in five basic design ranges each signified by the chain tension rating known as.

**SAMSON™ 380** for light materials and low duty applications.

**SAMSON™ 450** with its short pitch chain design ideal for medium duty mobile applications where the lowest entry height is required.

**SAMSON™ 450 Super** for medium duty continuous process applications typically handling fuels, crushed stone, clinker and similar graded materials.


**SAMSON™ 800** for continuous duty applications handling heavier mineral ores and where continuous availability is mandatory.

**SAMSON™ 1600** for extreme duty applications including ROM material sizes and for the most arduous operating conditions.




The Massive SAMSON™ 1600 receives Gabbros Rock from Shovels for Barge Loading at 1,000 t.p.h.

## SAMSON™ Construction

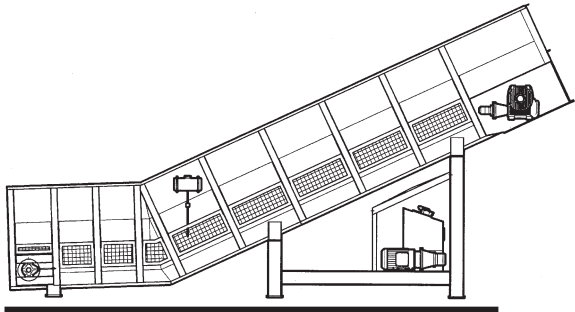


SAMSON™ 380

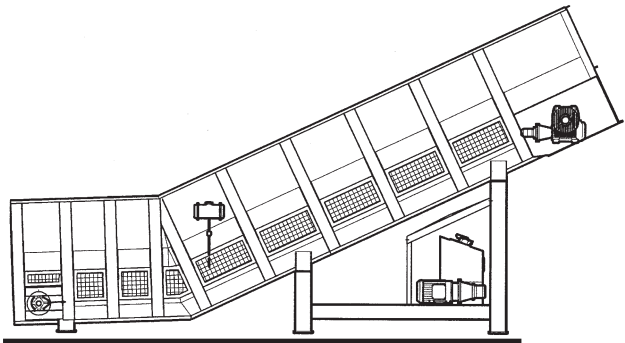


SAMSON™ 450

The SAMSON™ construction expands in strength as the chain specification increases

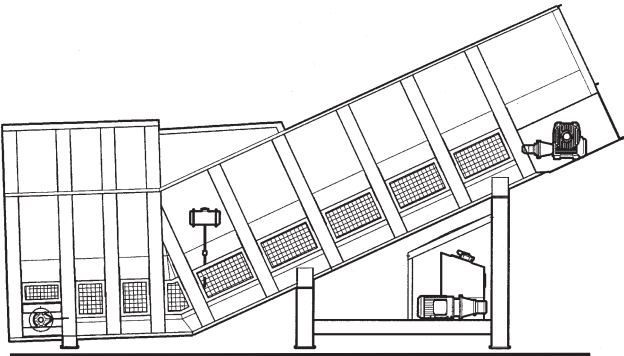

SAMSON™ 800

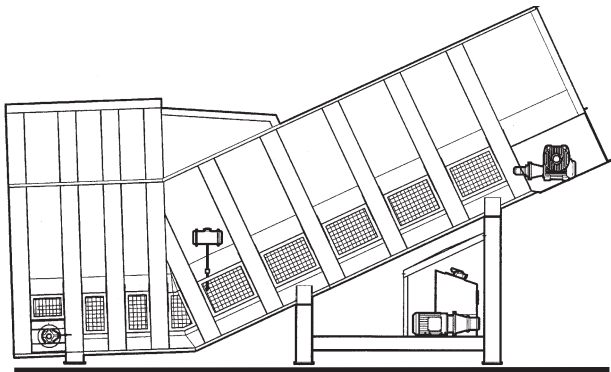

SAMSON™ 1600



The SAMSON™ with Deflected Chassis and Full Enclosure including Dust Filter receives Cement Clinker

## Dust and fume control

The SAMSON™ Surface Feeder is the ideal solution for the intake of dry and dusty materials where dust pollution is a real hazard. Material free fall is near zero and the bulk of the truck contents is drawn into the SAMSON™ body in a controlled stream eliminating particulate separation and therefore virtually eliminating dust pollution at source.


Only when handling the most dusty materials (Cement Clinker for example) is it necessary to provide dust extraction and then only a relatively small air volume is required. Typically only 25% of the rate required for extraction on conventional deep hoppers thus saving not only on capital cost but also on long term operational costs also.



Flow into the SAMSON™ in a Controlled Stream

With a conventional underground hopper the material falls free allowing particulate separation and generating high velocity displaced air.

The displaced air ejects the dust particles from the hopper at high speed causing extreme fugitive dust pollution with both environmental and health and safety implications.

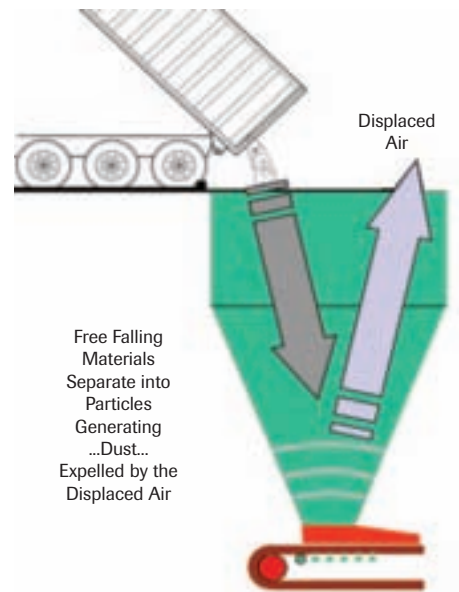

Conventional Underground Hopper



Resultant Dust Pollution





Enclosure with Fume Extraction for Odious Materials



Flexible PVC Sheet Partial Enclosure



Full Enclosure with Flexible Entry Curtain but without Dust Extraction



Full Enclosure with Ducted Dust Extraction

## Enclosures Systems



Enclosure with Extended Flared Entry for large Mining Dump Trucks

Fixed enclosures clad in Profiled Steel sheeting over a fabricated steel frame made integral to the body of the SAMSON™ eliminating the need for additional or separate buildings... less cost... greater flexibility...

The enclosure may be supplied complete in flat-packed components for site assembly or may be manufactured locally with an engineering only package by SAMSON.



The SAMSON™ enclosure integrated to a complete coal preparation plant handling ROM material direct from the adjacent open cast mine



SAMSON™ with Teaser Discharges to an Inclined Belt Conveyor




Synthetic Gypsum Intake to Board Plant




Synthetic Gypsum discharged to Horizontal Belt Conveyor

# Discharge Interface

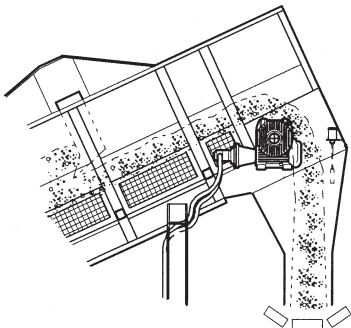

Parallel Head Chute for 90 degree Transfer

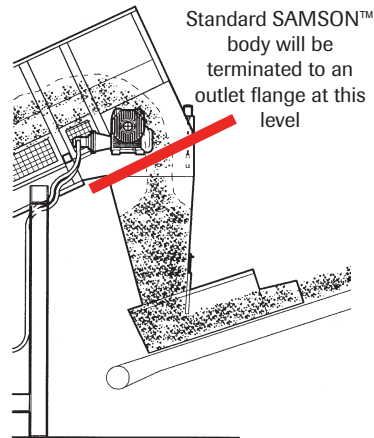

Centralising Head Chute



The SAMSON™ with a Centralising Head Chute discharges to a conveyor positioned In-Line

The Parallel Head Chute eliminates risk of bridging and blockage when handling cohesive materials and is always the preferred solution where the plant arrangement permits. Where the ongoing conveyor is in-line or at an angle to the SAMSON™ then the centralising chute is the only option but generally this solution is less compact and requires an increased discharge height.





Single Screw Feeder provides metered output to a Bucket Elevator



Vibro-Feeder controlling feed rate to a Steep Angle Belt Conveyor



Kleen-Line Belt Feeder transfer to Bucket Elevator

## Feeder Options



Twin Screws meter output to Progressive Cavity Pump



Vibro-Feeder with Reject Grill to remove over size material

For closely controlled discharge rate down to a few cubic metres per hour a suitable feeder device at the SAMSON™ discharge is required.

Using the SAMSON™ head chute as a small buffer hopper the output of the SAMSON™ is regulated using high a level detector to stop/start the drive and maintain a constant level in the head chute. Generally not used with a Levelling Blade except in special conditions.



Vibratory Feeder provides regulated output to an inclined belt conveyor





Four SAMSON™ Surface Feeders provide an Alternative Fuel Intake facility to a major Power Plant


# Alternative Fuels



Wood Chip Intake for a Brewery Steam Boiler



The Wide Apron-Belt SAMSON™ Concept is ideal for Difficult Materials

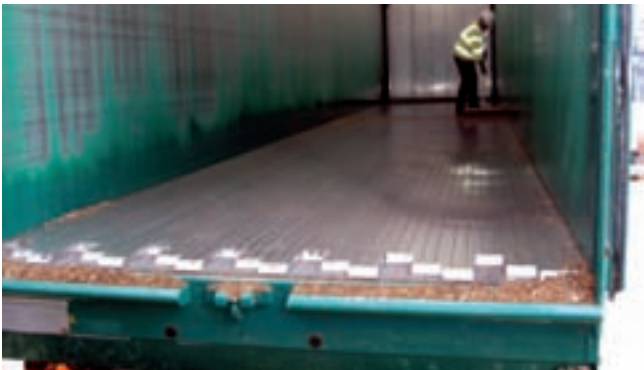

Intake from high capacity Live Floor Trailers

To satisfy Sustainability Obligations major energy users such as Power Utilities and Cement Plants utilise renewable resources such as Wood Chip and other wastes, by-products and co-products to offset their Carbon Footprint. The SAMSON™ is the ideal intake facility for such operations being able to handle most dry bulk solids with the added bonus of simplified installation, reduced project and operating costs and flexibility in location or possible relocation.





SAMSON™ 1600 with Tandem Drives using two Helical/Bevel Speed Reducers mounted one each side of the extended head shaft

## Drive Systems




Direct Coupled Hydraulic Motor Drive with local or remote hydraulic power unit allowing the electric motor and control equipment to be positioned clear of the feeder in a more accessible location

Stand alone SAMSON™ feeders are generally supplied with direct coupled electric motor drives with helical/bevel speed reducer mounted direct to the extended head shaft. For special applications tandem gears may be supplied (as shown above) and also hydraulic drives are available. ATEX certification supplied where required.



High efficiency Helical/Bevel main reduction gear with helical primary

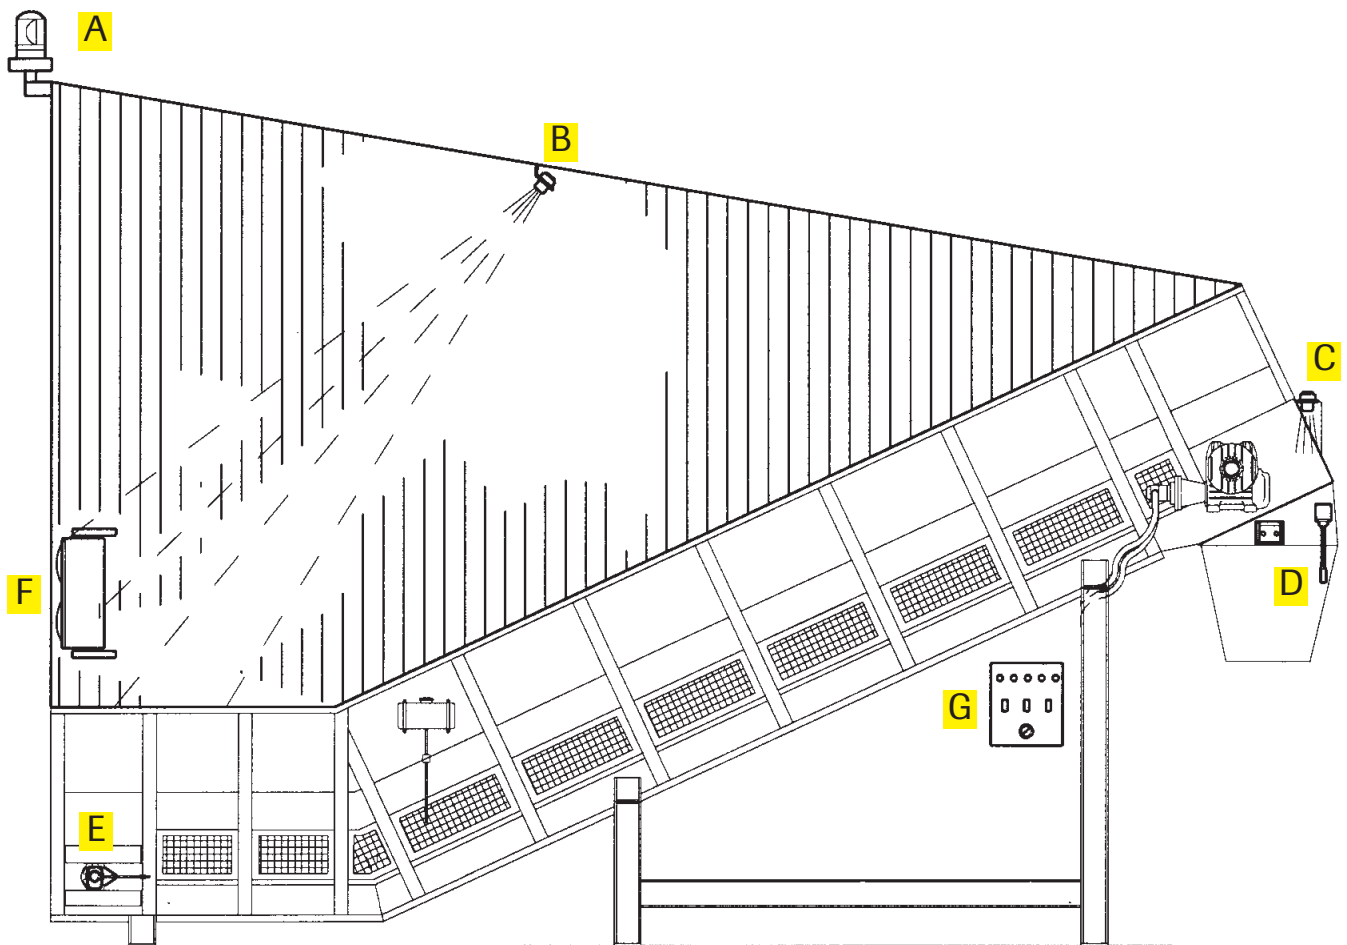

## Instrumentation

For the safe operation and protection of the SAMSON™ feeder various items of field instrumentation are available:

A - Rotating Warning Beacon linked to a drive torque monitoring system to warn of impending overload and indicate to the operator to cease filling.

B - Ultrasonic Detector to signal the presence of a vehicle at the SAMSON™ entry and initiate a controlled startup sequence for the SAMSON™ and the ongoing plant.

C - When the SAMSON™ head chutes forms a buffer hopper for an ongoing feeder this Level Detector is linked to the drive control to start the SAMSON™ on low level and stop on high level, see the diagram on the right.

D - Blocked Chute detector arranged to stop the SAMSON™ drive if the head chute is over filled or blocked with material.


E - Tail shaft Rotation Sensor to inhibit the drive system in the event rotation is lost in normal operation.

F - Traffic Lamp linked to the ongoing process control to signal either the machine readiness or the grade or type of material required. G - Local control cabinet plus safety stop system.

Instruments are generally supplied loose but with mounting brackets to fix to the SAMSON™ or Chutes.



Twin SAMSONS™ with Traffic Management

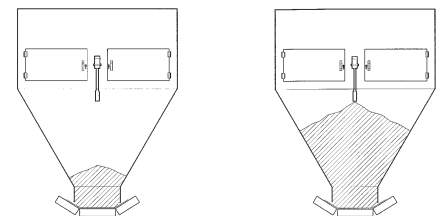

SAMSON™ starts on low level stops on high level

Chute Level Detection for use with an auxiliary feeder or when the ongoing conveyor acts as an extractor to control the feed rate.





Inverter Speed Control Modules located local to the SAMSON™ but linked to a remote control room



Local Cabinet with Motor Control Gear

## Controls

### Variable Output Rate


To control the output rate of the SAMSON™ feeder using the Levelling Blade system it is necessary to provide variable speed for the SAMSON™ belt drive.

For mechanical drives an Inverter is required to control the motor speed and therefore the belt speed. For a fixed levelling blade height the volumetric output rate is proportional to the belt speed.

For output rate control by mass the SAMSON™ speed control may be linked to a belt weigher on the following conveyor.

### Interfaces

Invariably the SAMSON™ will be linked to a plant control system for sequencing with other equipment. The SAMSON™ may be supplied with a local PLC plus necessary communication protocol compatible with the main plant control systems. Or, supplied with instrumentation only plus such as Inverter unit(s) which will be connected individually to the clients control systems located in the main plant control room.

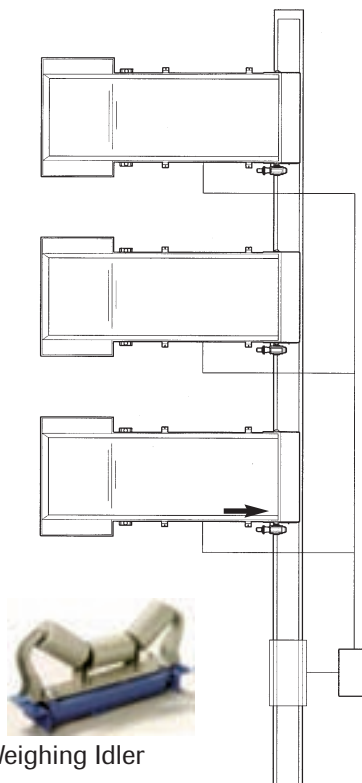

Weighing Idler

### Blending Systems

When several different materials must be blended onto a common collecting conveyor multiple SAMSON™ feeders, one for each material type, may be linked to a central controller and arranged to discharge a set blend ratio as a proportion of the total output as measured by a downstream belt weigh idler.



Control units are supplied loose for site installation either complete with all necessary motor control and logic gear or as a local control station only linked to an existing central motor control centre (MCC) perhaps located some distance from the equipment.



SAMSON™ plus Twin Shaft Rotary Sizer receives as-mined Limestone from dump trucks and provides a manageable lump size for onward conveying

## Sizing and Screening

The SAMSON™ may be supplied complete with integral rotary crusher or screening equipment to size the raw material before onward conveying, either as a package or engineered to suit free issue equipment.



As-Mined Limestone minus 800 mm



SAMSON™ supplied with Vibrating Screen to remove oversize material before onward conveying





The SAMSON™ 800 Series provides 100 cubic metres of live storage for Alternative Fuels in a Cement Plant.

# Live Storage Solutions


For handling difficult materials that are liable to bridge and block in conventional silos the SAMSON™ offers the ideal solution for live storage with holding capacities up to around 200 tons.

Illustrated above and right the conventional SAMSON™ design with horizontal loading section and inclined discharge, with this arrangement the storage volume is generally limited by the increased chain tension required to raise the load.


Illustrated below a specialised application for the storage of Sewage Sludge including twin SAMSON™ surface feeders each with belt conveyor transfer to two SAMSON™ horizontal storage units within the building able to store and discharge on demand.



Extended Inclined Section for increased storage or discharge height

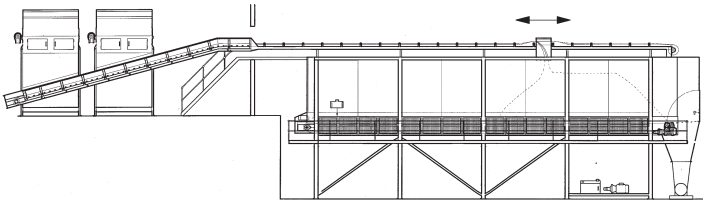

The SAMSON™ Horizontal Storage Bunker with Overhead Conveyor and Plough Discharger

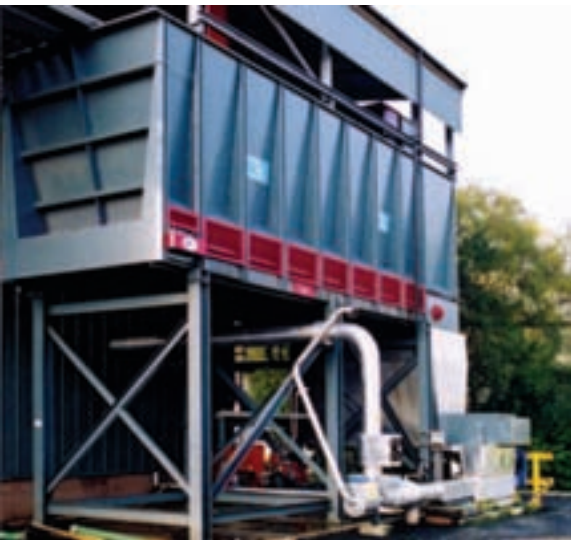



The Side Loading SAMSON™ receives Cement Clinker for import directly to an existing conveyor installation




In confined spaces the Side Loading solution may provide an economical alternative allowing a simplified plant layout with reduced transfer points and minimum disruption to the process operation during the new equipment installation. Side loading is particularly suited to drive-over-tip applications where the SAMSON™ may be mounted below floor level or supplied with a suitable ramp allowing the trucks to drive over the SAMSON™ entry section, tip and continue in the same direction, as illustrated below, the SAMSON™ is below the floor level.




Twin SAMSON™ Side Tip Feeders with Vertical Elevators to Dome Storage

## Side Loading and Drive over Tipping




Steep SAMSON™ Sides Plates Emillate Bridging



SAMSON™ Beneath Opening Doors Above



Truck Passes Over the Closed Doors



Stop Raises and Doors Open Automatically



Special Truck for wet and sticky Nickel Tailings



Truck Discharges through Open Doors






Discharge facility for Hopper Bottom Railcars receives coal for a Cement Plant including a SAMSON™ feeder with 80 tons holding capacity


## SAMSON™ under Rail or Road (SUR)

The SAMSON™ solution for Railcar discharge may be implemented in a shallow pit, typically with depth only 4.0 metres, ideally suited in port area with high ground water level or where working on hard rock increases the cost of the excavation which with a conventional tapered hopper could be as much as 14 metres deep to obtain the necessary hopper angle for reliable material flow handling such as industrial coals etc.

With a shallow pit the material free fall is minimised and, since the Apron-Belt of the SAMSON™ feeder is wider than the typical railcar, the material flows outward reducing the velocity of the displaced air and thereby reducing dust generation. With the deflected chassis design the raised discharge provides an ideal transfer to the following conveyor which, thanks to the shallow pit depth, may be of reduced length and therefore reduced energy input saving on capital and running costs.

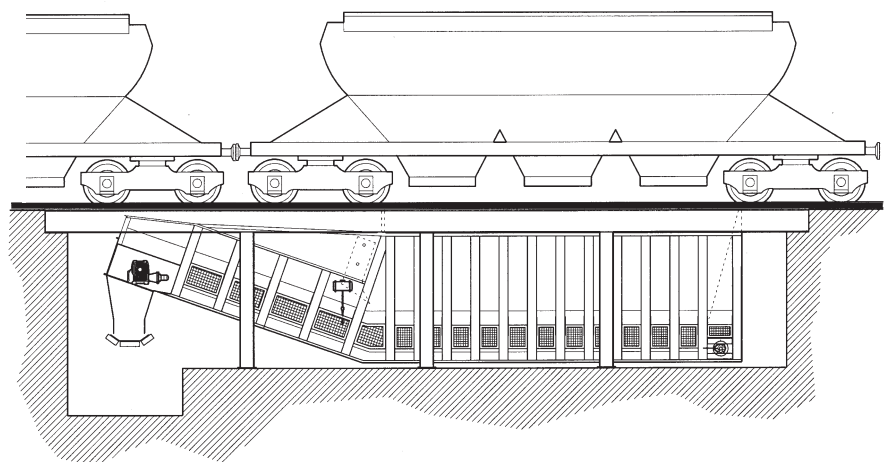

The Wide Apron-Belt SAMSON™ Concept permits a Shallow Excavation and Economical Installation

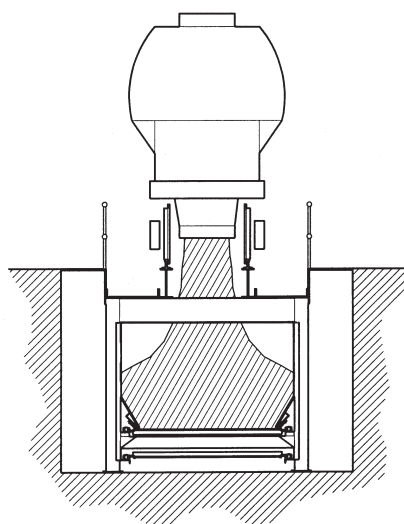



Twin SAMSON™ Feeders with Full Dust Control integrated to this Mobile Shiploader permits direct bulk export from Truck to Ship

# Mobile Shiploader and Stacker with Integral SAMSON™ Surface Feeders



STORMAJOR™ with integrated SAMSON™ 1600 Series Feeder and Radial Stacking Boom for Barge Loading



STORMAJOR™ combines the benefits of a SAMSON™ Surface Feeder with a Radial Stacking Boom mounted to a Common Mobile Chassis



# After-Sales and Service

SAMSON Materials Handling Ltd., strive to deliver the highest standards of customer support and after sales service worldwide with the collaboration of the local Aumund Group daughter companies and representative offices and including:

- Application advice
- Port or Plant Infrastructure Survey
- Performance and Selection Criteria
- Operational Guidance
- Machine Selection and
- Supervision of Site Assembly
- Commissioning
- Advice on Maintenance Programmes
- Rebuilding and Refurbishment
- Genuine Spare Parts
- Service Contracts

Our engineers are highly trained and experienced in the SAMSON™ products and familiar with port operations and the demands of shipping schedules where equipment availability is critical to avoid demurrage costs.



## THE AUMUND GROUP

### GERMANY

**AUMUND Fördertechnik GmbH**  
Saalhoffer Str. 17  
47495 Rheinberg  
Phone: +49 - 2843 - 72 0  
Fax: +49 - 2843 - 6 02 70  
e-mail: aumund@aumund.de  
www.aumund.com

### AUMUND Logistic GmbH

Saalhoffer Str. 17  
47495 Rheinberg  
Phone: +49 - 2843 - 72 0  
Fax: +49 - 2843 - 72 47 3  
e-mail: logistic@aumund.de  
www.aumund.com

### SCHADE Lagertechnik GmbH

Dorstener Straße 360  
44653 Herne  
Phone: +49 - 2325 - 58 74 0  
Fax: +49 - 2325 - 58 74 74  
e-mail: info@schade-lagertechnik.de  
www.schade-lagertechnik.com

### GREAT BRITAIN

#### SAMSON Materials Handling Ltd.

Gemini House Cambridgeshire  
Business Park, 1 Bartholomew's Walk  
Ely, Cambridgeshire CB7 4EA  
Phone: +44 - 1353 - 665 001  
Fax: +44 - 1353 - 666 734  
e-mail: sales@samson-mh.com  
www.samson-mh.com

### INDIA

#### AUMUND Engineering Private Ltd.

2nd Floor, Lakshmi Neela Rite Choice  
Chambers · 9, Bazulla Road,  
T. Nagar Chennai - 600 017  
Phone: +91 - 44 - 4393 63 00  
Fax: +91 - 44 - 2815 60 46  
e-mail: aumund@vsnl.com

### RUSSIA

#### AUMUND Representative Office Moscow

German-Russian House, Office 44  
ul. Malaya Pirogovskaya 5  
119435 Moscow / Russia  
Phone: +7 495 2879002  
Fax: +7 495 2879006  
e-mail: info@aumund.ru

### HONG KONG SAR

#### AUMUND Asia (H.K.) Limited

Unit 3B & 5, 30/F,  
148 Electric Road, North Point  
Hong Kong  
Phone: +852 - 3695 - 43 33  
Fax: +852 - 3695 - 43 11  
e-mail: info@aumund-asia.com

### DUBAI U.A.E.

#### AUMUND Fördertechnik GmbH Representative Office

P.O. Box 35291  
Dubai, UAE  
Phone: +971 - 4 - 2823762  
e-mail: catalina@aumund.com

### THE NETHERLANDS

#### AUMUND Holding B.V.

Wilhelminapark 40  
5911 EE Venlo  
Phone: +31 - 77 - 320 01 11  
Fax: +31 - 77 - 320 07 28  
e-mail: info@aumund-holding.nl

### SWITZERLAND

#### AUMUND AG

Arther Str. 3  
6301 Zug  
Phone: +41 - 41 - 710 10 82  
Fax: +41 - 41 - 710 42 02  
e-mail: info@aumund.ch

### FRANCE

#### AUMUND France S.A.R.L.

43, rue de Trévisse · F 75009 Paris  
Phone: +33 - 1 - 42 46 72 72  
Fax: +33 - 1 - 42 46 72 74  
e-mail: aumund@aumund.fr

### BRAZIL

#### AUMUND Ltda.

Av. Eng. Luis Carlos Berrini, 716  
4. andar - Conj. 41  
04571-000 São Paulo / SP, Brazil  
Phone: +55 - 11 - 3059 0160  
Fax: +55 - 11 - 3059 0161  
e-mail: aumund@aumund.com.br

### USA

#### AUMUND Corporation

1825 Barrett Lakes Boulevard  
Barrett Lakes Center II  
Suite 520  
Kennesaw, GA 30144  
Phone: +1 - 770 - 226 - 95 78  
Fax: +1 - 770 - 953 - 48 44  
e-mail: sales@aumundusa.com

### P.R. CHINA

#### AUMUND Machinery Trading (Beijing) Co. Ltd.

Rm. 7-8, 22-F, East Ocean Centre  
No. 24 Jianguomenwai Avenue  
Chaoyang District  
Beijing 100004  
Phone: +86 - 10 - 65 15 58 13 / 14  
Fax: +86 - 10 - 65 15 58 15  
e-mail: aumund@aumund.cn



AUMUND GROUP Headquarters in Rheinberg, Germany

**SAMSON**  
AUMUND GROUP

Products offer a unique concept in bulk materials handling with Surface Mounting and Mobility for maximum flexibility in location and economy in installation and operation.

Often opening new opportunities for processes on short term contract options that with conventional fixed plant or traditional underground hoppers and feeders would not be economically viable.

**SAMSON Materials Handling Ltd.**

**Gemini House, Cambridgeshire Business Park, 1 Bartholomew's Walk, Ely, Cambridgeshire, CB7 4EA, UK.**

Tel: +44 - 1353 - 665001 • Fax: +44 - 1353 - 666734 • e-mail: [sales@samson-mh.com](mailto:sales@samson-mh.com)

**[www.samson-mh.com](http://www.samson-mh.com)**